

*Nikfus* 尼克福斯


## 取样钢瓶系列



- 材料为不锈钢，其它材料可按需提供。
- 连接尺寸范围:1/8"~1/2"。
- 最大工作压力:6000psi(413bar)。
- 进出口NPT内螺纹。

取样钢瓶

材料	316L SS	316L SS, 304L SS	304L SS	316 SS	304L SS
规范	DOT-3A 5000	DOT-3E 1800	DOT-3A 1800	无	DOT-4B 500
温度, °C (°F)	工作压力, psig (bar)				
53 (65) 至 37 (100)	5000 (344)	1800 (124)	1800 (124)	1000 (68.9)	500 (34.4)
93 (200)	3960 (272)	1360 (93.7)	1360 (93.7)	840 (57.8)	500 (34.4)
148 (300)	3570 (245)	1230 (84.7)	1230 (84.7)	760 (52.3)	500 (34.4)
204 (400)	3290 (226)	1130 (77.8)	1130 (77.8)	700 (48.2)	500 (34.4)
260 (500)	3060 (210)	1050 (72.3)	1050 (72.3)	650 (44.7)	500 (34.4)
315 (600)	2920 (201)	1000 (68.9)	1000 (68.9)	620 (42.7)	500 (34.4)
343 (650)	2870 (197)	980 (67.5)	980 (67.5)	610 (42.0)	500 (34.4)
371 (700)	2810 (193)	970 (66.8)	970 (66.8)	590 (40.6)	500 (34.4)
398 (750)	2750 (189)	950 (65.4)	950 (65.4)	580 (39.9)	500 (34.4)
426 (800)	2700 (186)	930 (64.0)	930 (64.0)	570 (39.2)	500 (34.4)
454 (850)	2640 (181)	—	—	560 (38.5)	—

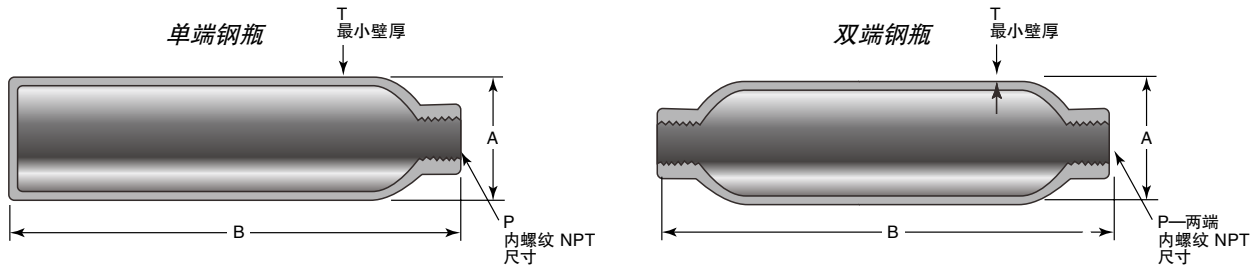

材料等级/ 钢瓶规格	压力等级 psig (bar)	内部容积 cm <sup>3</sup> ± 5 %	P in.	订购号	尺寸, in. (mm)			重量 lb (kg)	
					A	B	T		
单端									
304L SS/ DOT-4B 500	500 (34.4)	150	1/4	S4L-05TF4-150	2.00 (50.8)	4.88 (124)	0.093 (2.4)	1.1 (0.50)	
		300		S4L-05TF4-300		8.62 (219)		1.8 (0.82)	
		500		S4L-05TF4-500		13.6 (345)		2.7 (1.2)	
双端									
304L SS/ DOT-3E 1800	1800 (124)	40	1/8	S4L-18TF2-40	1.25 (31.8)	3.88 (98.6)	0.070 (1.8)	0.31 (0.14)	
		50	1/4	S4L-18TF4-50	1.50 (38.1)	3.75 (95.2)	0.093 (2.4)	0.38 (0.17)	
		75		S4L-18TF4-75		4.94 (125)		0.62 (0.28)	
		150		S4L-18TF4-150	2.00 (50.8)	5.25 (133)		0.94 (0.43)	
		300		S4L-18TF4-300		8.94 (227)		1.6 (0.73)	
		400		S4L-18TF4-400		11.4 (290)		2.1 (0.95)	
		500		S4L-18TF4-500		13.8 (351)		2.6 (1.2)	
1000	1/4	S4L-18TF4-1000		3.50 (88.9)		10.9 (277)		0.180 (4.6)	6.5 (2.9)
1000	1/2	S4L-18TF8-1000							
304L SS/ DOT-3A 1800	1800 (124)	2250	1/4	S4L-18TF4-2250	4.00 (102)	17.2 (437)	0.206 (5.2)	14 (6.4)	
			1/2	S4L-18TF8-2250					
		3785 (1 gal)	1/4	S4L-18TF4-1GAL	4.00 (102)	26.7 (678)		0.206 (5.2)	21 (9.5)
			1/2	S4L-18TF8-1GAL					
			1/4	S4L-18TF4-1GAL					
316L SS/ DOT-3E 1800	1800 (124)	150	1/4	SL-18TF4-150	2.00 (50.8)	5.25 (133)	0.093 (2.4)	0.94 (0.43)	
		300		SL-18TF4-300		8.94 (227)		1.6 (0.73)	
		500		SL-18TF4-500		13.8 (351)		2.6 (1.2)	
316L SS/ DOT-3A 5000	5000 (344)	150	1/4	SL-50TF4-150	1.90 (48.2)	8.00 (203)	0.240 (6.1)	3.0 (1.4)	
		300		SL-50TF4-300		14.5 (368)		5.6 (2.5)	
		500		SL-50TF4-500		23.5 (597)		9.1	

## **北京尼克福斯阀门科技有限责任公司**

---

地址:北京市大兴区丽园路港悦大厦7号楼1101  
电话:86-010-66117795  
传真:86-010-63733307 网址:[www.nikfus.cn](http://www.nikfus.cn)  
邮编:100071 邮箱:[sale1@nikfus.com](mailto:sale1@nikfus.com)

## **沧州尼克福斯仪表有限公司**

---

地址:河北省沧州市南皮工业区  
手机:13811443727 (微信同号)  
邮编:061599 网址:[www.nikfus.cn](http://www.nikfus.cn)